



OIL FIRED UPFLOW FURNACE SPECIFICATIONS

MODEL NO.	OH6FX072DV4R			
HEATING CAPACITY	LOW CAPACITY		HIGH CAPACITY	
	Low Fire	High Fire	Low Fire	High Fire
HEAT INPUT RATE (BTUH)	70,000	85,000	85,000	106,250
OUTPUT BTUH ¹	61,500	74,000	74,000	91,000
SEASONAL EFFICIENCY ²	87.0			
LARGEST REC A/C ³	4 tons		4 tons	
NOMINAL TEMP RISE	64°	64°	64°	64°
HEAT EXCHANGE AREA				
CASING HEIGHT (IN.):	45"			
CASING WIDTH (IN.):	20"			
CASING DEPTH (IN.):	30"			
NOMINAL FLUE OUTLET DIA.	5"			
APPROX SHIPPING WEIGHT	250 lbs.			
APPROVAL AGENCY	U.L.			
QTY AND SIZE OF PERMANENT FILTERS	(1) 24-3/4" x 15-3/4"			
ELECTRICAL REQUIREMENTS	120 / 60 / 1			
MAX FUSE SIZE ECM	15			
TOTAL CURRENT (AMPS) ECM	12.1			
HEIGHT FROM FLOOR TO CENTER OF FLUE (FRONT FLUE) (REAR FLUE)	40 3/4"			
SUPPLY AIR OUTLET SIZE (W-IN. X D-IN.)	18" x 19"			
RETURN AIR DUCTWORK CONNECTION FLANGE SIZE ON FILTER RACK (D-IN. X H-IN.)	24-1/2" x 15"			
RETURN AIR INLET OPENING SIZE IN SIDE CASING TO BE CUT-OUT BY DEALER (D-IN. X H-IN.)	23" X 14"			
	ACCESSORY ITEMS			
PROGRAMMABLE T-STAT STD/DELUXE	350164 / 350165			
BLOCKED VENT KIT ⁴	AOPS2687			

- SEE NEXT PAGE FOR MORE DATA -

¹ OUTPUT BTUH BASED ON ANNUAL FUEL UTILIZATION EFFICIENCY RATED BY MANUFACTURER.

² SEASONAL EFFICIENCY (ALSO CALLED AFUE - ANNUAL FUEL UTILIZATION EFFICIENCY) RATINGS ARE BASED ON TESTS FOLLOWING U.S. DEPARTMENT OF ENERGY TEST PROCEDURES.


³ TO PERMIT LARGEST RECOMMENDED AIR CONDITIONING (AT .5 STATIC PRESSURE), SELECTION OF THE HIGHEST MOTOR SPEED IS REQUIRED.

⁴ NOT TO BE USED IN SIDEWALL VENT APPLICATION, USE ONLY WHEN CHIMNEY VENTED.


Model Number Digit	1	2	3	4	5	6	7	8	9	10	11	12
	Fuel	Configuration	Heat Exchanger Identifier	Flue	Design Change	Capacity	Capacity	Capacity	Blower Type	Clg Airflow Cap.	Clg Airflow Cap.	Burner
Oil Furnace Model Nomenclature Example Model Numbers	O	H	6	F	X	0	7	2	D	V	4	R
O = Oil	O											
H = Highboy		H										
6 = Heat Exchanger Size Identifier			6									
F = Front				F								
X= 2 Stage					X							
Heating Capacity MBTUH (000's) with factory installed nozzle						0	7	2				
D = Direct Drive									D			
Clg. Airflow Variable Speed (ECM) V4= 4tons										V	4	
R = Riello												R

- SEE NEXT PAGE FOR MORE DATA -

OIL FIRED UPFLOW FURNACE SPECIFICATIONS

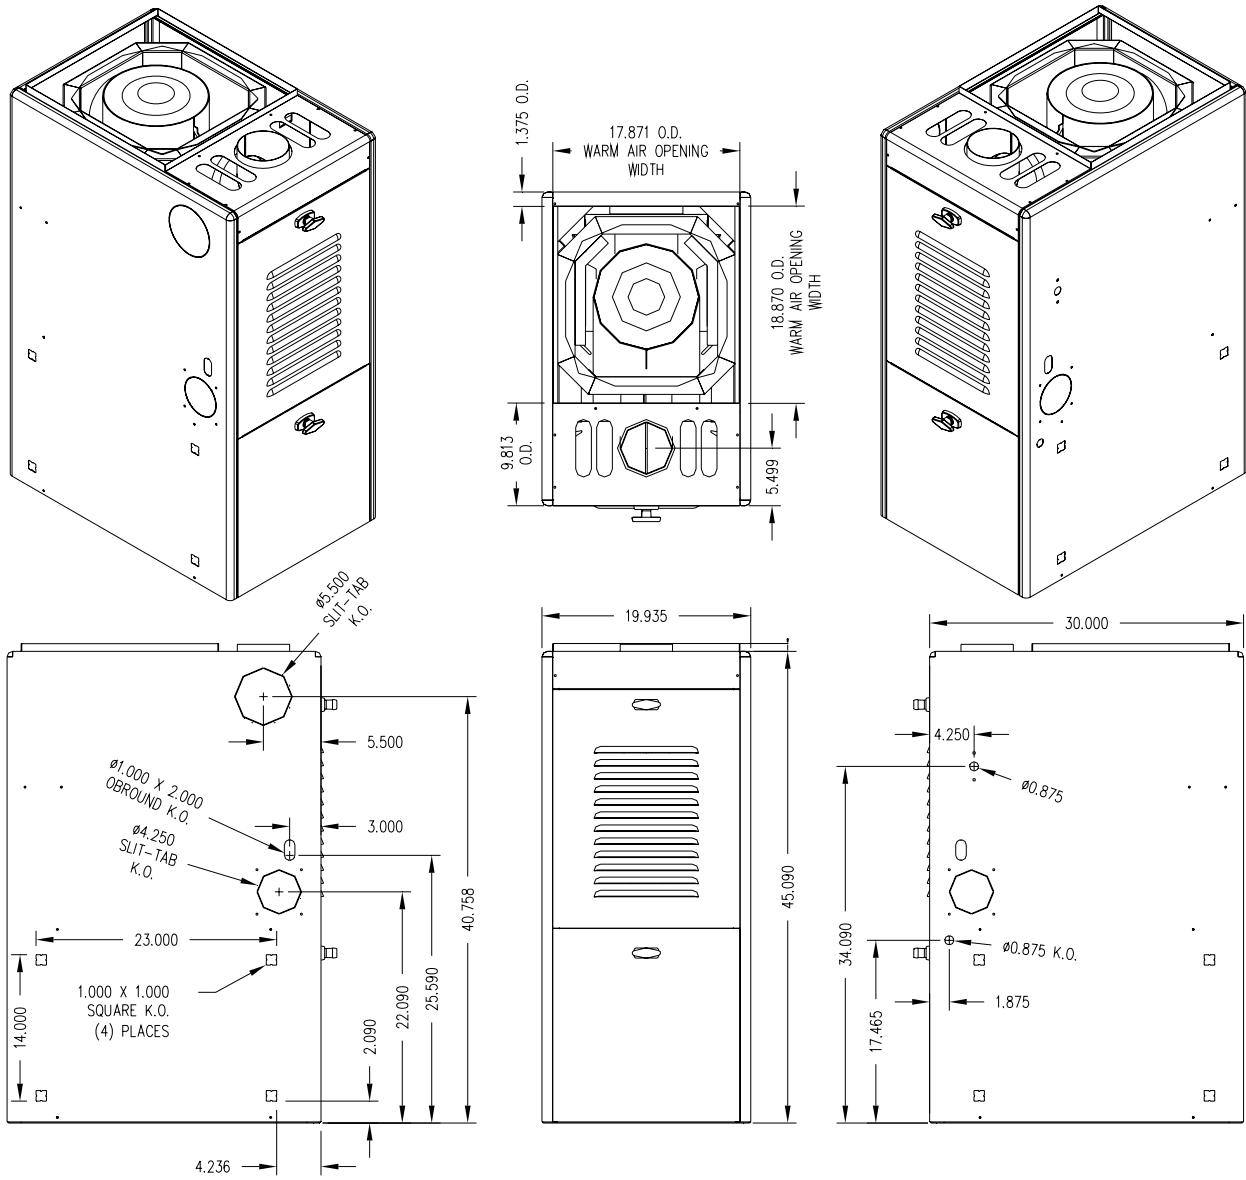

FILTER RACK SPECIFICATIONS

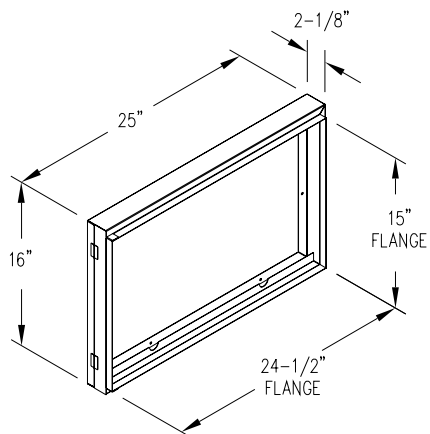

- SEE NEXT PAGE FOR MORE DATA -

OIL FIRED UPFLOW FURNACE SPECIFICATIONS

BLOWER DATA:	OH6FX072DV4
BLOWER MODEL¹	DD 100-9R
MOTOR H.P.	¾ HP Variable Speed
MOTOR TYPE	ECM
HIGH SPEED AIRFLOW (SCFM) @ 0.5 IN. W.G. EXTERNAL STATIC PRESSURE:	1600
Diameter x Width	10 x 9

BURNER DATA	RIELLO "G5D"	
AIR TUBE LENGTH (IN.)	4 ½"	
BURNER HEAD TYPE:	Fixed	
FUEL TYPE:	#2	
NOZZLE RATING (GPH):	70-45° W	50-45° W
SPRAY ANGLE (DEG.):	45°	45°
SPRAY PATTERN:	W	W
OIL PUMP PRESSURE (PSIG):	130 / 170	130 / 170
COMBUSTION CHAMBER TYPE:	REFRACTORY (HARD CERAMIC)	

CLEARANCES	
	MINIMUM CLEARANCES TO COMUSTIBLE MATERIALS:
SIDES	0"
FRONT (SERVICE ACCESS)	(Clearance to Combustibles) 6" / 24" (Service)
REAR	0"
FLUE	7"
TOP PLENUM	1"
SIDES PLENUM	1"

¹ DD = DIRECT DRIVE

- SEE NEXT PAGE FOR MORE DATA -

OIL FIRED DOWNFLOW FURNACE SPECIFICATIONS

HEATING AIR FLOW / TEMPERATURE RISE

		LOW CAPACITY		HIGH CAPACITY	
FAN CONTROL SW 1 SWITCH SETTINGS	BTUH	LOW FIRE 60,000	HI FIRE 72,000	LOW FIRE 72,000	HI FIRE 90,000
	HEATING CFM	APPROX. CFM/RISE (°F)	APPROX. CFM/RISE (°F)	APPROX. CFM/RISE (°F)	APPROX. CFM/RISE (°F)
3 - OFF 2 - OFF 1 - OFF	740	592 / 94°	740 / 90°	592 / 113°	740 / 113°
3 - OFF 2 - OFF 1 - ON	812	650 / 85°	812 / 82°	650 / 103°	812 / 103°
3 - OFF 2 - ON 1 - OFF	883	706 / 79°	883 / 75°	706 / 94°	883 / 94°
3 - OFF 2 - ON 1 - ON	968	744 / 72°	968 / 69°	774 / 86°	968 / 86°
3 - ON 2 - OFF 1 - OFF	1054	843 / 66°	1054 / 63°	843 / 79°	1054 / 79°
3 - ON 2 - OFF 1 - ON	1153	922 / 60°	1153 / 58°	922 / 72°	1153 / 72°
FACTORY SW1 SWITCH SETTINGS 3 - ON 2 - ON 1 - OFF	1267	1013 / 55°	1267 / 53°	1013 / 66°	1267 / 66°
3 - ON 2 - ON 1 - ON	1424	1139 / 49°	1424 / 47°	1139 / 59°	1424 / 59°

= Recommended heating speed setting

Cooling Speed set-ups

Fan Control SW 1 Switch Settings	Clg. Tonage	Air Flow	
		Cool	Continuous
6-OFF 5-OFF 4-OFF	2	799	500
6-OFF 5-OFF 4-ON	2.5	1017	508
6-OFF 5-ON 4-OFF	3	1210	605
6-OFF 5-ON 4-ON	3.5	1404	702
FACTORY SW1 SWITCH SETTINGS 6-ON 5-OFF 4-OFF	4	1622	799

OIL FIRED UPFLOW FURNACE SPECIFICATIONS

A/C EVAPORATOR COIL APPLICATION

FURNACE MODEL	CONDENSER MODEL	LINE SET MODEL	EVAPORATOR COIL MODEL	SEER	EER	TOTAL (BTU/HR) HEAT REMOVAL	SENSIBLE HEAT REMOVAL
OH6FX072DV4	AC14241G2	LS01E-30 LS01E-50	13U2430AB15	15.30	13.40	25,000	0.731
			CA243618	15.40	13.60	25,400	0.734
			13U3030AB15	15.40	13.60	25,400	0.734
			CA303618	16.00	14.00	25,800	0.739
			13U3036AB17	16.00	14.00	25,800	0.739
	AC14301G2	LS01E-30 LS01E-50	13U2430AB15	15.20	13.50	29,600	0.736
			CA243618	15.40	13.70	30,000	0.740
			13U3030AB15	15.40	13.70	30,000	0.740
			CA303618	16.00	14.20	31,000	0.750
			13U3036AB17	16.00	14.20	31,000	0.750
	AC14361G2	LS03E-30 LS03E-50	13U2430AB15	14.80	13.10	34,600	0.736
			CA243618	15.00	13.30	35,200	0.740
			13U3030AB15	15.00	13.30	35,200	0.740
			CA303618	15.40	13.65	36,200	0.749
			13U3036AB17	15.40	13.65	36,200	0.749
	AC14421G2	LS03E-30 LS03E-50	CA424218	14.40	12.70	41,500	0.746
			13U3642AB17	14.40	12.70	41,500	0.746
			CA424820 ¹	14.70	13.10	42,500	0.748
			13U4248AB20	14.70	13.10	42,500	0.748
			13C4860HA26 ²	15.00	13.10	43,000	0.758
	AC14481G2	LS03E-30 LS03E-50	CA424218	13.40	12.00	46,500	0.745
			13U3642AB17	13.40	12.00	46,500	0.745
			CA424820 ¹	13.70	12.20	47,500	0.748
			13U4248AB20	13.70	12.20	47,500	0.748
			13C4860HA26 ²	14.10	12.60	49,000	0.758

¹ adapter angles included with coil cabinet

² adaption required