



ADDITIONAL SPECIFICATION DATA


OIL FIRED FORCED WARM AIR FURNACES

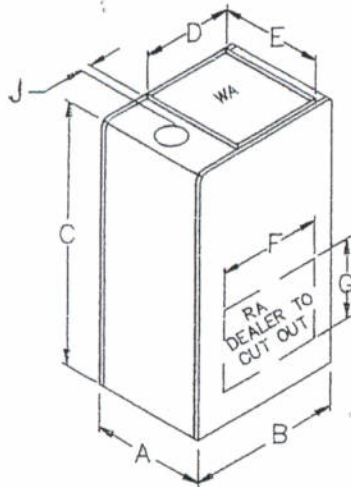

HIGHBOY (OH)

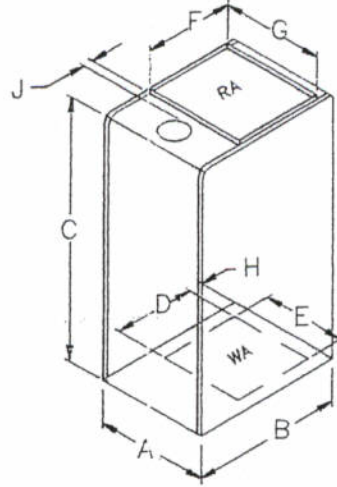

COUNTERFLOW (OC)

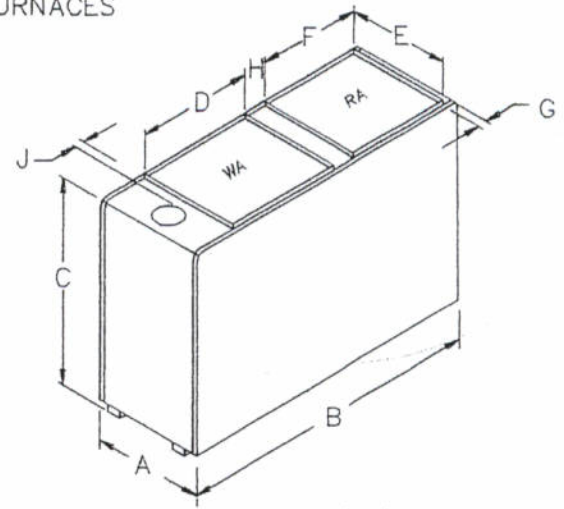

LOWBOY (OL)

MODEL	A	B	C	D	E	F	G	H	J	K	L
OL2-56	19	48	34-3/4	17	17	17	2-1/2	3-1/4	1-1/2	28-1/2	-
OL5-85	25	50-1/4	43-1/4	20	20	14	1-3/4	4	3	35-1/4	-
OL11-105	25	54-1/2	46-1/2	20	20	16	2	3-3/4	4-1/4	37-3/4	-
OL16-125	27	58-1/2	46-1/2	22	22	18	1-1/2	4-1/4	3-1/4	39-1/4	-
OL20-151	27	58-1/2	50-1/2	22	22	18	1-1/2	4-1/4	3-1/4	43-1/4	-
OL33-200	34	72	60-3/4	28	28	24	2-3/4	5	-	51	-
OL37-250	38	85-1/2	67-3/4	32	32	28	4	7-3/4	-	58-1/4	-
OL39-320	38	85-1/2	67-3/4	32	32	28	4	7-3/4	-	58-1/4	-
OH2-56	19	27	52	17	17	18	14	-	1-1/2	46-1/2	-
OH3-72	22	30	56	16	16	18	14	-	4-1/2	49	-
OH5-85	24	33	56	20	22	23	14	-	3-3/4	51	-
OH11-105	24	34	59-1/2	20	22	23	14	-	3-3/4	53-1/4	-
*OH16-125	27	36-1/2	66	22	22	23	14	-	3-1/2	57-1/2	-
OC2-56	19	27	57-1/2	17	17	17	17	3/4	1-1/2	28-1/2	56
OC5-85	24	33	56	16	20	20	22	5-1/2	3-1/2	31-1/2	125


DIMENSIONS F & G FOR HIGHBOY MODELS ARE THE RETURN AIR CUT OUT DIMENSION. THESE ARE SMALLER THAN THE RETURN AIR DUCT DIMENSIONS AS THEY ALLOW FOR A 1" MOUNTING FLANGE. DUCTWORK FOR THESE HIGHBOY MODELS SHOULD BE SIZED BY THE FILTER SIZES LISTED IN THE BROCHURE.

NOTE: K = THE APPROXIMATE DIMENSION FROM THE BASE OF THE FURNACE TO THE CENTERLINE OF THE FLUE PIPE ON THE HEAT EXCHANGER.

L = SPECIAL FURNACE BASE MODEL NUMBER FOR USE ON COMBUSTIBLE FLOOR (SEE COMBUSTIBLE FLOOR BASE PAGE).

SEE NEXT PAGE FOR MORE DATA -

ADDITIONAL SPECIFICATION DATA

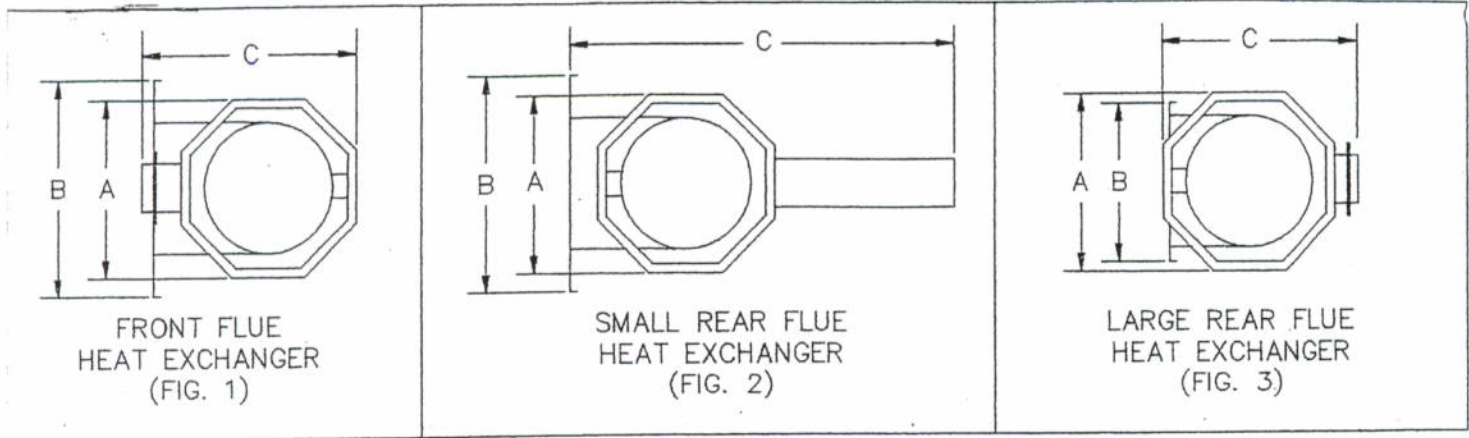

NOTE: DIMENSIONS OF THE HEAT EXCHANGER ARE THE EXTREME OVERALL AND WILL ASSIST IN DETERMINING THE EASE OR DIFFICULTY OF PASSAGE THRU A DOORWAY. NOTE CHART - SOME MODELS DIMENSION "A" IS LARGER THAN DIMENSION "B" EVEN THOUGH SKETCH SHOWS OTHERWISE.

MODEL	FIG.	A	B	C	D	MODEL	FIG.	A	B	C	D
OC2-56	1	16-1/4	19	19	32	OL16-125R	2	23-1/4	27	50	44
OC5-85	1	21	24	23-3/4	35-3/4	OL20-151F	1	23-1/4	27	26	48
OH2-56	1	16-1/4	19	19	32	OL20-151R	2	23-1/4	27	50	48
OH3-72	1	19-1/2	22	21	36-1/4	#OL33-200F	1	30-1/4	28	45-3/4	57-1/4
OH5-85	1	21	24	23-3/4	37-1/4	#OL33-200R	3	30-1/4	28	33-1/4	57-1/4
OH11-105	1	22	24	24-1/4	39-1/4	#OL37-250F	1	34	30	49-1/2	65
*OH16-125	1	23-1/4	27	26	44	#OL37-250R	3	34	30	37	65
						#OL39-320F	1	34	30	49-1/2	65
OL2-56F	1	16-1/4	19	19	32	#OL39-320R	3	34	30	37	65
OL2-56R	2	16-1/4	19	41-3/4	32	OT5-85F	1	20-1/2	13-1/2	27	43-1/2
OL5-85F	1	21	25	23-3/4	39-1/4	OT5-85R	2	20-1/2	13-1/2	27-1/4	43-1/2
OL5-85R	2	21	25	42-3/4	39-1/4	OT11-105F	1	23-3/4	13-1/2	26-3/4	43-1/2
OL11-105F	1	22	25	24-1/4	41-3/4	OT11-105R	2	23-3/4	13-1/2	27-1/4	43-1/2
OL11-105R	2	22	25	46-1/4	41-3/4	OT16-125F	1	26	13-1/2	28-1/2	46
OL16-125F	1	23-1/4	27	26	44	OT16-125R	2	26	13-1/2	28-3/4	46

MODELS ARE SHIPPED KNOCKED DOWN
D = HEIGHT FLOOR TO TOP OF HEAT EXCHANGER.

SEE NEXT PAGE FOR MORE DATA -